

*When the show must go on*

**EIKI**



**16MM Sound Projector  
SLIM Self-Threader**

**SNT**  
SERIES

*Simply, the best*

## INTRODUCING EIKI'S NEW SELF-THREAD PROJECTOR

The first thing you notice about the Eiki SNT-series is its attractive new styling. But Eiki quality is much more than skin deep.

It's the most reliable, highest-quality self-threader on the market. And slim line construction makes it as portable as it is well-built. It offers spectacular sound reproduction. A 35 watt amplifier powers both the 25 watt built-in speaker and the 50 watt remote speaker in the removable cover, for use with larger audiences. A new larger 14-tooth sprocket for safe and gentle film handling.

There's an automatic lower loop restorer that allows you to screen severely damaged film.

Eiki's famous modular construction makes most repairs screw driver simple. So, experience self-thread simplicity and reliability with our high-performance SNT-series.

With Eiki, you can be sure the show will go on. And on.

### FEATURE ATTRACTIONS

- Single rotary control for maximum safety and convenience
- High-speed reel-to-reel rewind without need for arm or reel change (Automatic safety control prevents rewind with film in projectionpath)
- Individual bass and treble tone controls
- Key-locked front cover for safety
- Inching knob
- 14-tooth sprocket for easier film handling
- Still picture clutch
- 8 ohm, 1/4" external speaker jack
- 600 ohm line output
- Spare lamp holder, built-in
- Built-in cord storage
- Automatic loop restorer permits successful showing of damaged film
- BRK exciter lamp with simple replacement
- Film accessible for unthreading mid-reel
- Modular construction
- Hi-low lamp switch for maximum lamp life
- Energy efficient low voltage ELC lamp

I LIKE  
EIKI

EIKI INDUSTRIAL CO., LTD.

# HIGHEST-QUALITY SELF-THREAD.


## MAIN SPECIFICATIONS

- POWER SOURCE** : 100-240VAC, 50/60Hz, fitted to your electric requirements  
Dual (Switchable) model optional
- POWER CONSUMPTION** : 430W
- PROJECTION LAMP** : ELC 24V 250W
- STANDARD LENS** : 50mm (2") f1.2, 6-element, coated with micro-focusing, 160 lines per mm (center) resolution
- SHUTTER** : 2 blade as standard; 3 blade (5 blade for TV) optional
- EXCITER LAMP MOTOR** : 4V - 0.75A, BRK  
: 40W induction, with capacitor (plug in module)
- FILM SPEED** : 24 fps, sound speed  
: 24 and 18 fps, sound and silent speed optional
- LOOP CONTROLS CONTROL SWITCH** : Lower loop restored automatically  
: Single rotary switch for forward, lamp, reverse and rewind
- LAMP BRIGHTNESS REWIND** : 850 lumens typical  
: High-speed reel to reel. No reel or arm change required  
Optional - Auto stop switch at end of switch
- REEL CAPACITY** : 600m (2000ft) reel standard  
Max. up to 720m (2400ft)
- EXTERNAL SPEAKER JACK** : 8 ohm 1/4" phone with 600 ohm unbalanced line, when using 1/4" stereo phone plug

- AMPLIFIER** : Solid state (plug in module)  
25W RMS 35W Max.
- TONE CONTROL** : Treble and bass
- WOW & FLUTTER** : Less than 0.2%
- LAMP SWITCH** : High/low
- FILM THREADING** : Self-thread
- ANAMORPHIC LENS HOLDER** : Optional, swing-down style
- STILL PICTURE** : Manual, with heat filter
- INCHING KNOB** : Yes
- PUBLIC ADDRESS MICROPHONE INPUT** : Yes
- AMPLIFIER INPUT** : Impedance 600 ohm or higher, input level 10mV max
- SPEAKER CORD** : 15m (50ft) (with model SNT-1, 2, 3)
- POWER CORD** : 3.5m (11.5ft)
- ELEVATION** : 13° max
- WEIGHT** : With type '0' cover, 13.8 Kgs (30.41 lbs)  
With type '1, 2, 3,' cover, 14.7 Kgs (32.40 lbs)
- DIMENSIONS** : 365 (W) x 300 (H) x 195 (D) mm (without front cover)  
14.4 (W) x 11.8 (H) x 7.7 (D) inches (without front cover)
- EACH PROJECTOR IS SUPPLIED WITH** : Vinyl dust cover, cleaning kit, built-in 3.5m power cord, 600m (2000ft) take-up reel, spare exciter lamp and spare fuses

### Supplementary Lenses Available:

12.5mm (f1.5), 25mm (f1.5), 38mm (f1.5), 65mm (f1.5), 75mm (f1.8), 100mm (f2.2), Zoom converter (x0.75-x1.25, or 0.75-1.3), Anamorphic lens

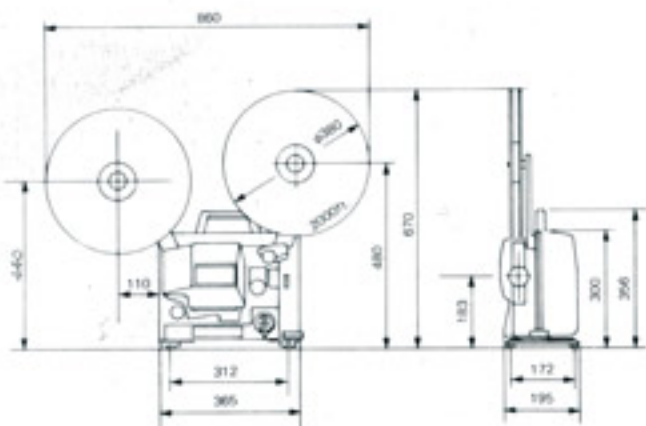

model	sound	Speaker	
		in rear cover	in front cover
SNT-0	Opt. playback	one 10 x 15cm (4 x 6 in) 8 ohm	No
SNT-1	Opt. playback	one 10 x 15cm (4 x 6 in) 8 ohm	twin 12.5cm (5 in) 16 ohm
SNT-2	Opt. & Mag. playback	one 10 x 15cm (4 x 6 in) 8 ohm	twin 12.5cm (5 in) 16 ohm
SNT-3	Opt/Mag. & magnetic recording	one 10 x 15cm (4 x 6 in) 8 ohm	twin 12.5cm (5 in) 16 ohm
SNT-02	Opt. & Mag. playback	one 10 x 15cm (4 x 6 in)	No

\* Note: SNT-02 is available on special order

AUTHORIZED EIKI DISTRIBUTORS & DEALERS

# EIKI

**When the show must go on.**

EIKI INDUSTRIAL CO., LTD.

Naniwa Bldg., 4-12 Manzaicho,  
Kita-ku, Osaka 530, Japan