


SEIKI

16mm RE-FLEX CAMERA

MODEL SRC-16-1

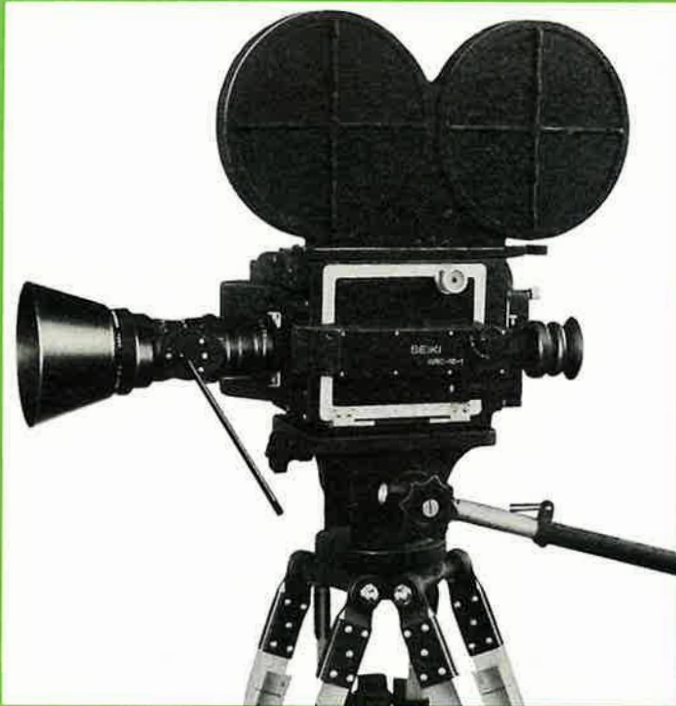

Seiki 16mm reflex camera, model SRC—16~1 has been developed specially for the professional use after our high technical research and is designed in the most up-to-date style.


It is mostly recommendable to produce film drama, to collect data for the news as well as to shoot the sporting events with the following speciality:

- Self blimp type : Body is made of special light metal and adapted self blimp type. Perfect sound proofed and extremely light in weight.
- Pure mirror reflex : Excellent distinction and equilibrium on the screen by special manufacturing process.
- No flicker while shooting : By eccentric cam system with resist pin, almost no-flicker.
- Shutter : Provided with Dissolve shutter same as the conventional studio camera and also being well furnished the miniature shutter is suited to stop motion filming too.
- Change of forward and reverse : by motor-switch, instant change over is possible.
- Easy in operation.
- Light in weight and handling etc.



● TECHNICAL DATA

- a **FILM SIZE** 16mm
- b **FILM CAPACITY** 400 feet double compartment type magazine with gear drive, 600 feet magazine also available
- c **LENS** Single lens, "Seiki" instant change bayonet lensmount, Zoom lens also attachable.
- d **MOVEMENT** Single pilot pin, Single pull-down claw, Removable aperture plate and pressure plate and side pressure.
- e **SHUTTER** With miniature shutter indicator, 0° to, 160° variable 144° for T.V.
- f **FOCUSING AND FINDER** Through the lens focusing and viewing with Reflex Rotary mirror.
- g **MOTORS** Synchronous motor, A.C. 100V, 1-Phase, 50 or 60 cycle, Variable speed motor, D.C. 12V., 8~32 frames per second, with tachometer.
- h **MAGAZINES** 400 feet capacity double compartment type, with drive gear, can be forward and reverse by motor switch.

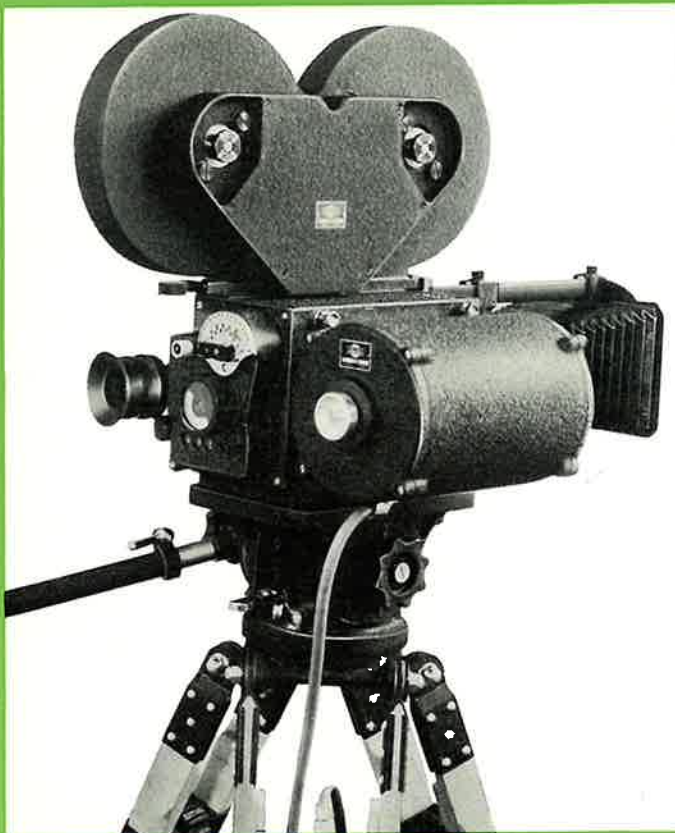

● ITEM

1. CAMERA BODY, MODEL SRC-1 1 pce.
2. 400 FEET FILM MAGAZINE 2 pce.
(GEAR DRIVE SYSTEM)
3. SYNCHRONOUS MOTOR., A.C. 100V., 1-PHASE
50 OR 60 CYCLE 1 pce.
4. VARIABLE SPEED MOTOR., D.C. 12V 8~32 FRAMES
PER SECOND, WITH TACHO-METER 1 pce.
5. STANDARD TRIPOD 1 pce.
6. FRICTION HEAD 1 pce.
7. MATTE BOX AND SUN SHADE 1 pce.
8. CAMERA CARRYING CASE 1 pce.
9. ACCESSORY CARRYING CASE 1 pce.
10. MOTOR CARRYING CASE 2 pce.



SEIKI COMPANY, LTD.

NO. 25 7-CHOME, TAKINOGAWA, KITA-KU
TOKYO, JAPAN




TEL. (983) 1161~5
CABLE ADDRESS
"SEIKISEI TOKYO"

SEIKI

16mm PROFESSIONAL CAMERA

MODEL S.P.C. - 16~1

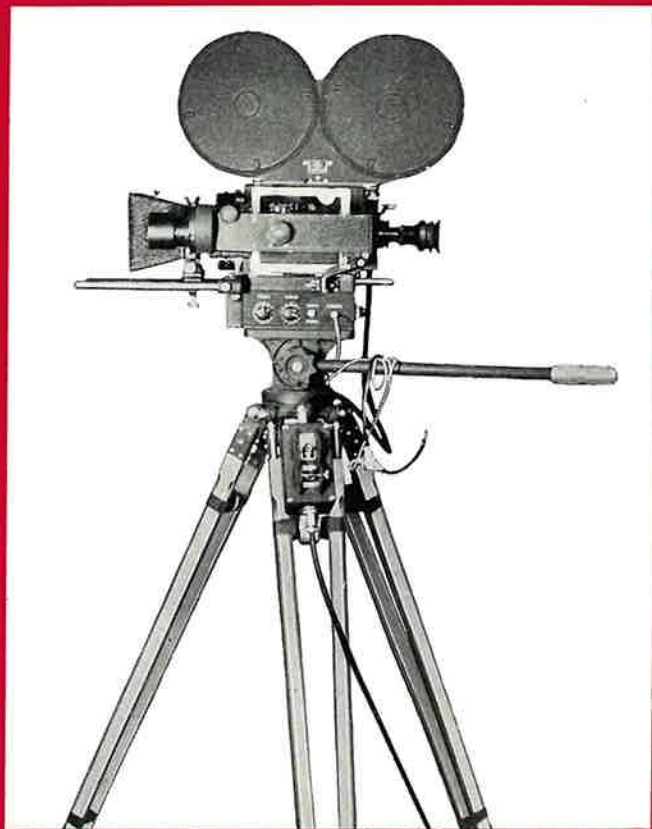

TECHNICAL DATA

FILM SIZE	16 mm.
FILM CAPACITY	600 feet double compartment type magazine, accept 100 feet or 200 feet daylight spools.
LENS	Four lens turret, "C" type lens mount with adapter ring for heavy duty type.
MOVEMENT	Single pilot pin, Single pull-down claw, Removable aperture plate and pressure plate.
SHUTTER	With Miniature shutter indicator, 0° to 165° variable 144° for T.V.
FOCUSING	Variable magnification erect image focusing telescope built into camera door. Racked-over system. Built-in contrast viewing filters and two register pins. Focus tube - 20 and 7 magnifying power.
VIEW FINDER	Large erect image for different focal length lenses. Parallax free follow-focus attachment available. Available adapter lens for enlarge and reduction.
MOTOR	A.C. 100V., 50 c/s or 60 c/s., sound proof type synchronous motor. D.C. 12V. Variable speed motor with tachometer.

SUNSHADE Adapted two pieces of filter holders for 3" x 3"

OTHER FEATURE Built-in "VEADER" footage and frame counter. Buckle trip operates if fails to take-up.

MAGNETIC HEAD ASSEMBLY Can be adapted recording and instant-monitor heads equipments to the camera by the order. Recording head is placed on 28 frames from aperture gate.

AMPLIFIER ASSEMBLY Transistor amplifier box can be fitted by a knob between camera and friction head.

Power source: Dry battery, 006P x 9V, 5 pcs.

Control panel: VU. meter, two micro-phone connectors, one line jack (input 10.k Ω), head-phone jack.

ACCESSORIES FOR SOUND EQUIPMENT

Dynamic micro-phone (changeable 600 Ω and 30 Ω) 1 pcs.
Micro-phone cable, 50 feet 1 pcs.

Head phone 1 pcs.

CARRYING CASE For camera body with amp, box 1 case

For two magazines, View Finder and Sunshade 1 case.

For synchronous motor 1 case.

For variable speed motor 1 case.

