



B&W REVERSAL - C4 PROCESS

- B& reversal camera film: Kodak 7265, 7266, 7276⁺, 7278⁺
- B&W universal negative Orwo UN54 processed as reversal

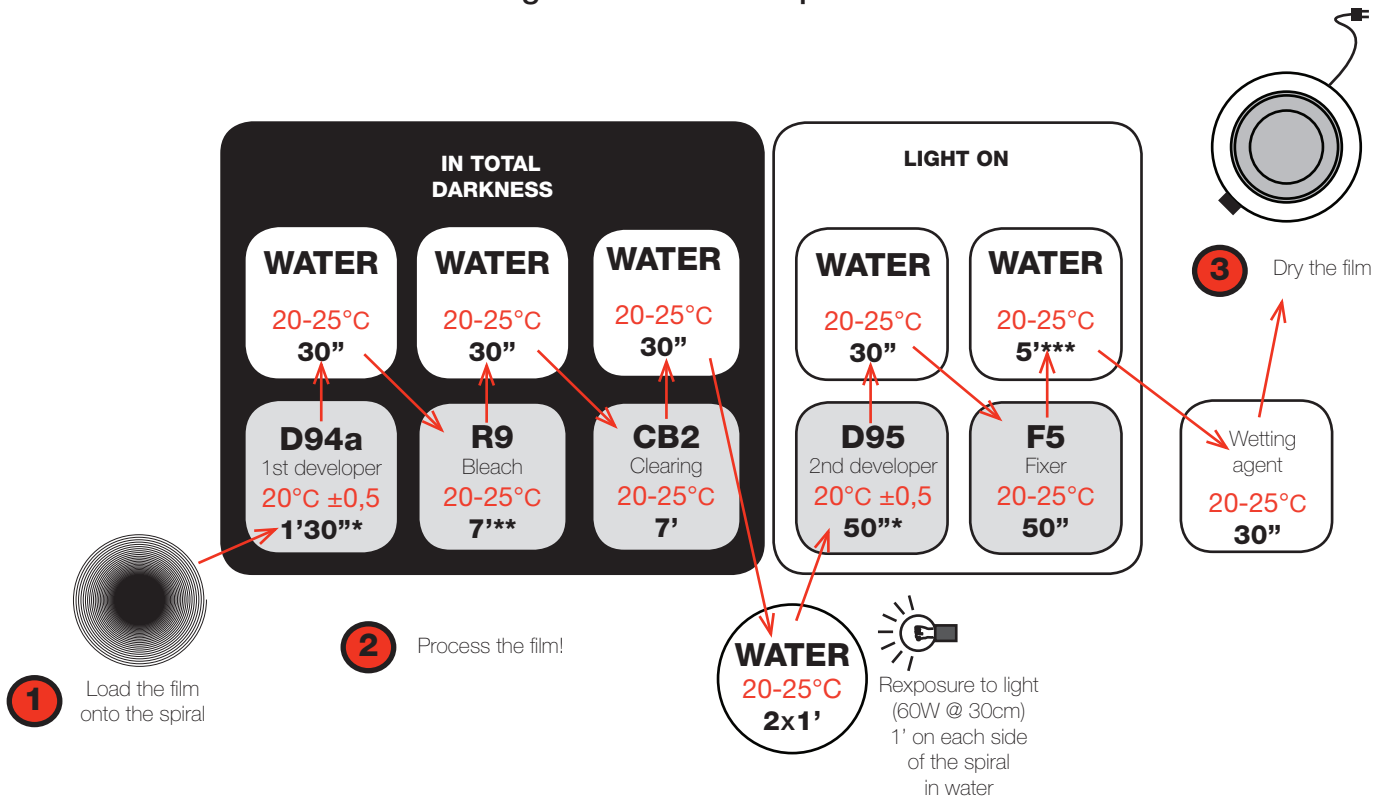

* Developing time (and/or temperature) depends on the type of film, on the desired level of contrast, and on the amount of exposure correction when needed. The chart below shows standard developing times corrected for temperature. In order to agitate, rotate the spiral slowly and continuously, alternatively clockwise and counter-clockwise.

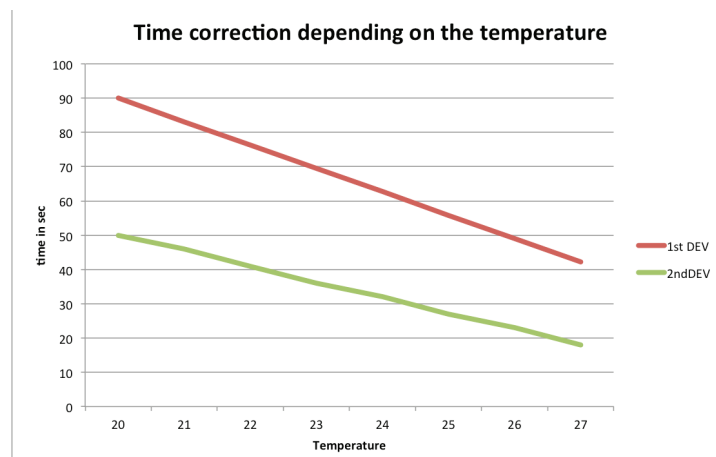

** Agitation is critical in the bleach as well! Avoid using R10 bleach which is often a source of problems.

*** Rinse the film after the fix bath preferably in running water, for example in an overflowing tank.

Replenishment	D94aR	R9R	CB2R	D95R	F5R
→ for 15m of S8mm:	55 ml	61 ml	49 ml	19 ml	30 ml
→ for 2x15m of S8mm:	110 ml	122 ml	98 ml	38 ml	60 ml
→ for 30m of 16mm:	220 ml	245 ml	195 ml	75 ml	120 ml

Adjust proportionally for shorter footage.